




# Inflate on the side = Inflate safely

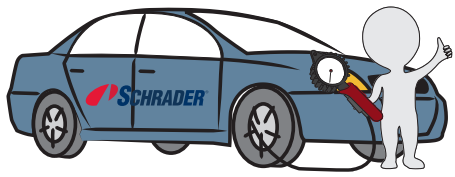

CAR

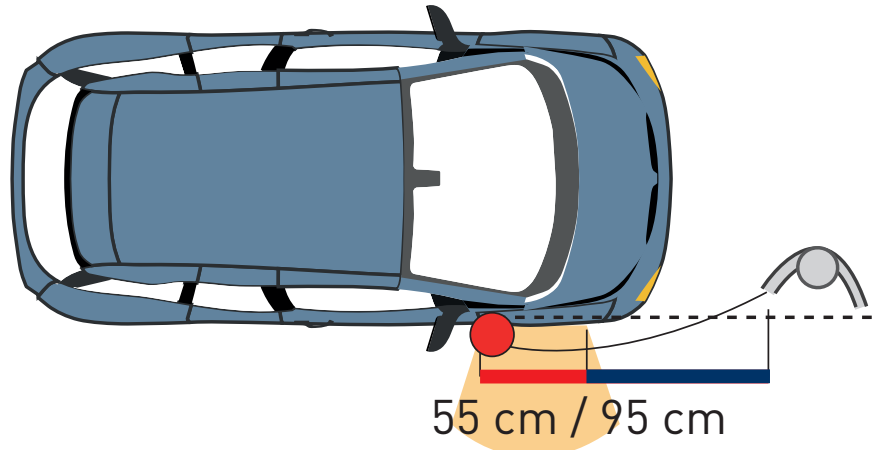


1,50 m hose

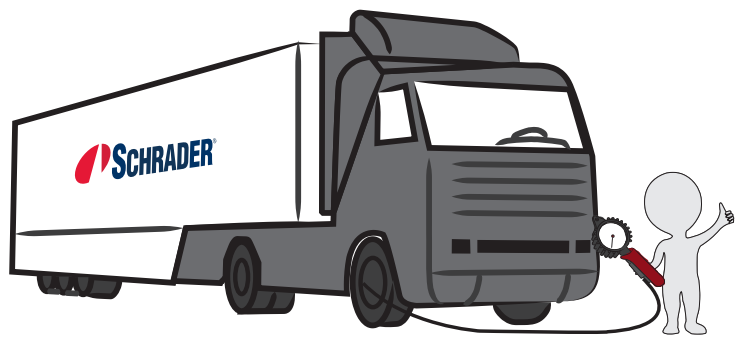


TRUCK



3 m hose

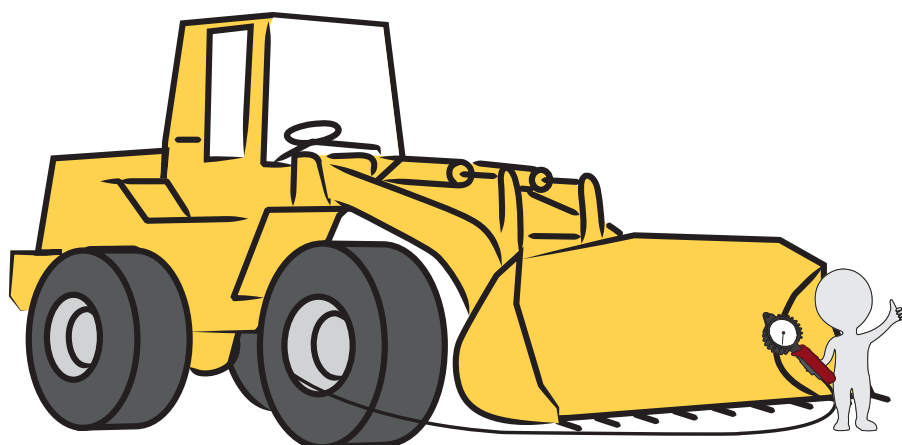


EARTHMOVER

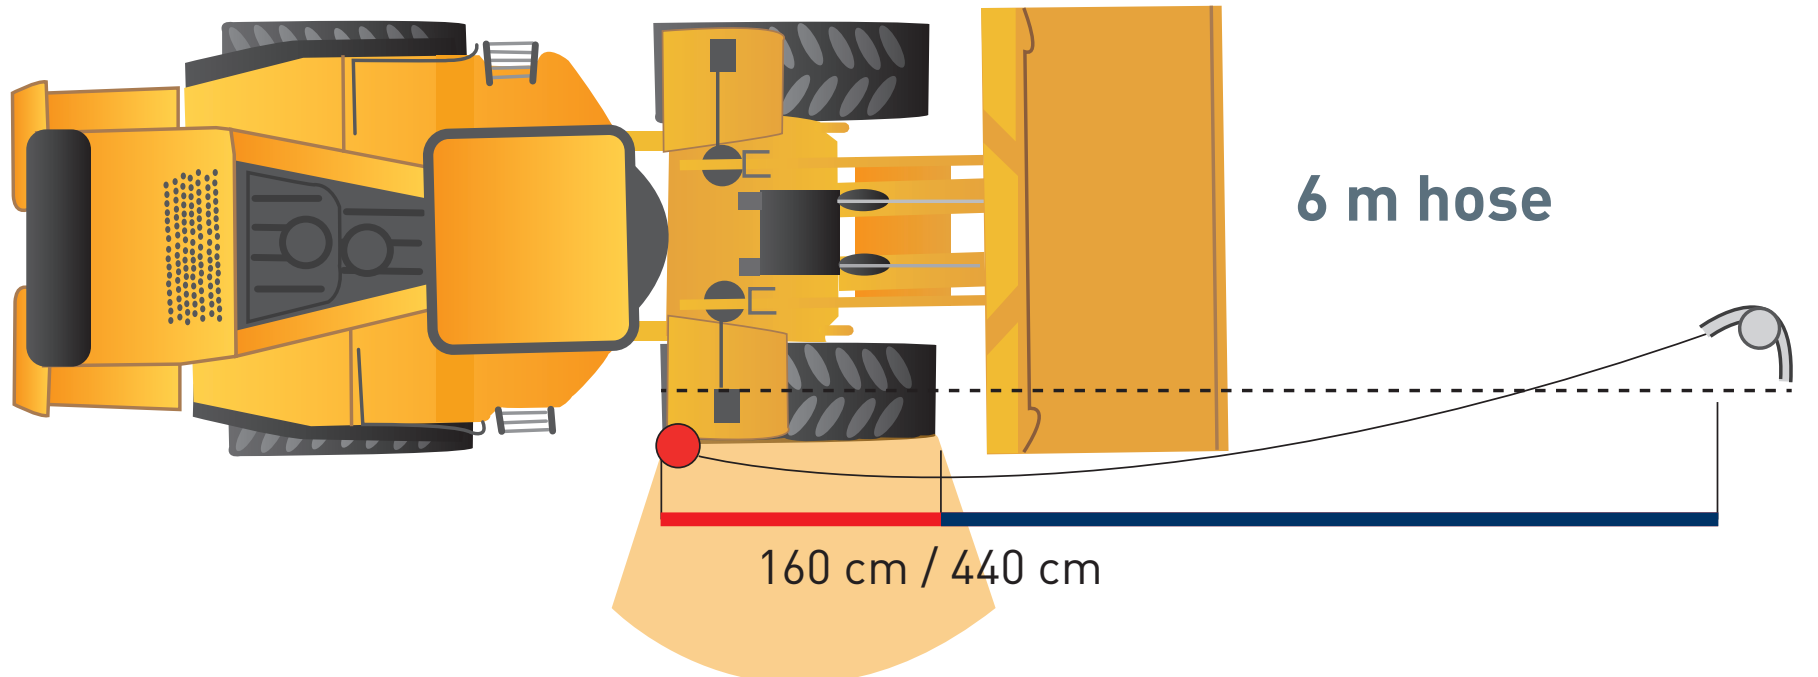

6 m hose

 Valve
  Ø wheel
  Safety distance between the wheel and the person
  Hose
  Person
  Main zone of projections

## Inflation cage

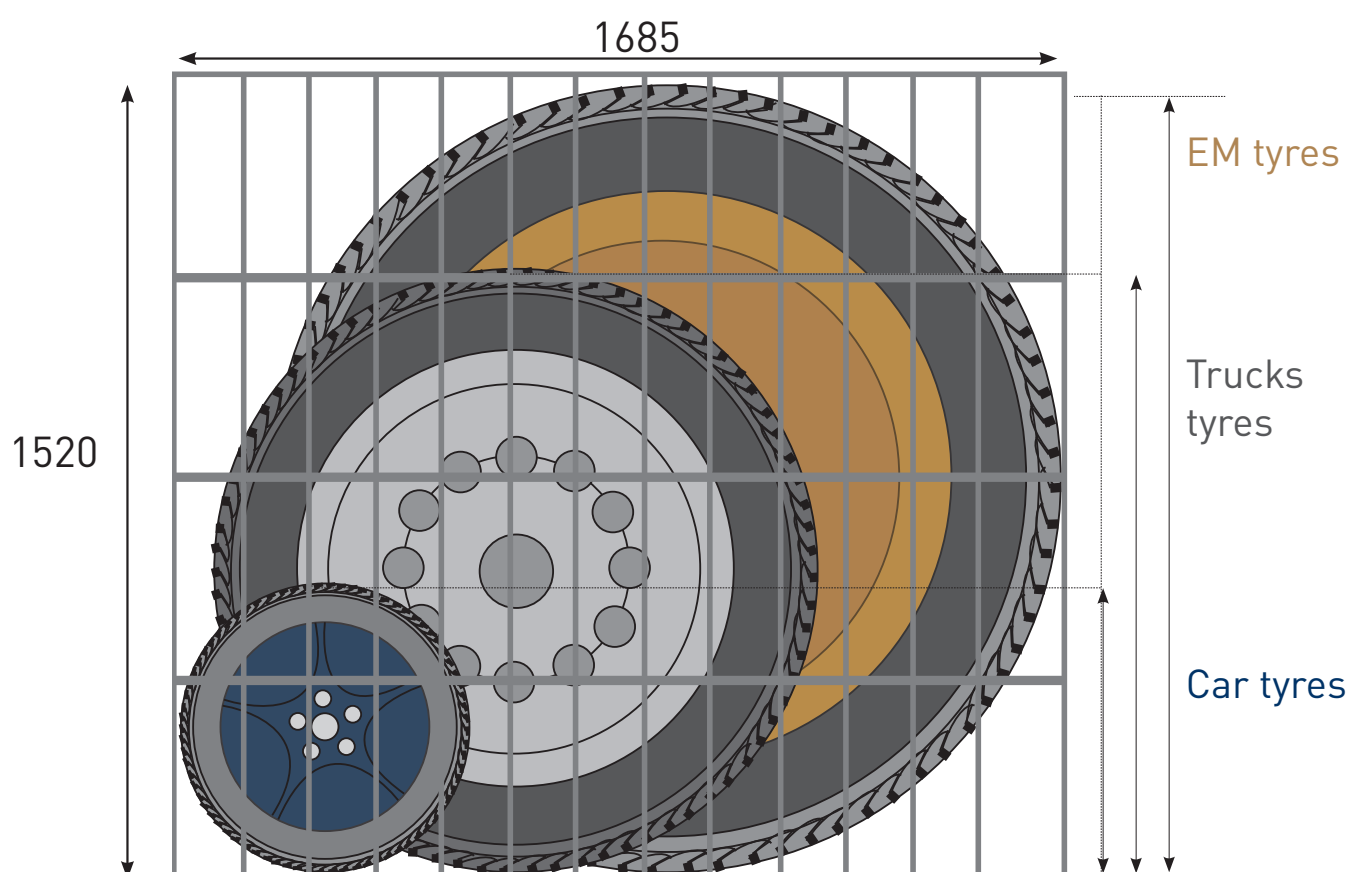

The basic rule is that you should never **stand neither in front of the wheel nor above it. Always remain at a safe distance from the tyre during the inflating process** and stand in the axis of the tyre tread even if a safety cage is used. The hose's length between the gauge and the valve must be long enough to enable inflation at a safe distance **and prevent the operator from being in the trajectory of possible projections.**

Source : INRS (National Institut of the Research and Safety)