


# APPLICATION CHART

## *Vintage and Classic Cars*

Rim Size	Application Size	Ounce Needed
12"	125R12	3
14"	P165/75R14	3
	P175/70R14	3
	P185/70R14	3
	P205/75R14	3
	P215/70R14	3
	F70/14	3
	G70/14	3
	695/14	4
	750/14	4
	800/14	4
15"	P205/75R15	3
	P215/75R15	3
	P225/75R15	4
	P235/75R15	4
	P215/70R15	4
	775/15	4
	E70/15	4
	F70/15	4
	F60/15	4
	G60/15	4
	670/15	4
	710/15	4
	760/15	4
	155 S R15	4
16"	600/16	4
	650/16	4
19"	450/19	4
	475/19	4
21"	4.40R21	4
	4.50R21	4
30"	30" x 3"	6
	30" x 3.5"	6

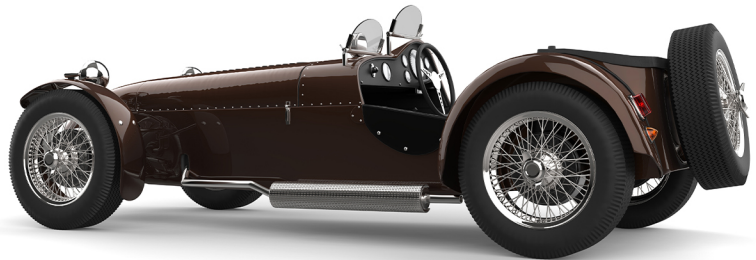

Modern reproduction wire wheels for Model T = 2oz

21" wire wheels (26/27 Model T) = 4oz

19" wheels (Model A, etc) = 4oz

17" wheels (30s cars) = 4oz

Vintage cars with wooden spokes and demountable rims = 6oz

Vintage cars with wooden spokes and felloes = Minimum of 5oz

Pre- WW1 Oldsmobile = Minimum 6oz

These weights are based on a guideline of 1oz of beads per 13lbs of wheel and tire weight.  
Note: older wheels tend to be more out of balance.